



Setting up the Speakerphone

CONNECTING THE SPEAKERPHONE


1. Connect the supplied USB Type-C cable into the port on the side of the speakerphone.

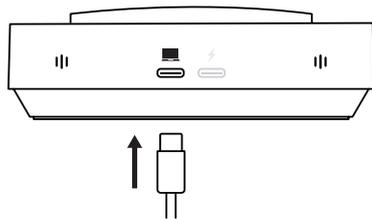


2. Connect the other end of the supplied cable into an available port on your PC or Laptop.

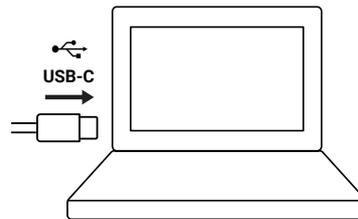

3. Connect an HDMI cable from your display into the port on the side of the speakerphone.

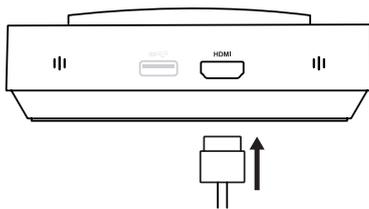


4. When a USB device is connected, the speakerphone will automatically power on, indicated by the Power LED shown below.

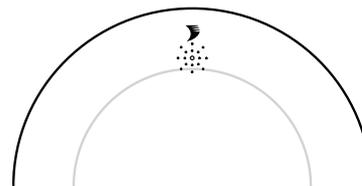

Additional Connections


Power Adapter to provide direct USB-C power and charging of connected devices such as laptops and mobile devices. A minimum of 60 and maximum of 90 watts is required for additional charging capabilities.

Connect a USB Type-C cable into the port at the base of the speakerphone from a power adapter marked with a lightning symbol.

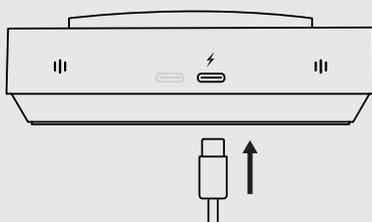

The Halo 90 Speakerphone allows for the connection of up to two USB-A device ports for connection of keyboard/mouse or webcams.


Connect a USB Type-A cable into the port at the base of the speakerphone marked with a SS USB symbol.

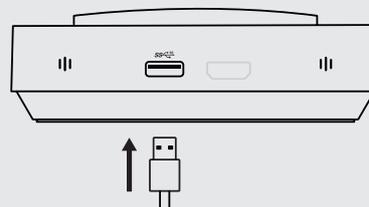

Software Device Setup


Connecting To Zoom

To connect the WyreStorm HALO Speakerphone to your Zoom software, first navigate to your settings pane which can be found by clicking the gear icon in the top right hand corner, then click on the Audio tab. Here you can change the speaker and microphone by using the dropdown menus. Select WyreStorm HALO device under the applicable options.

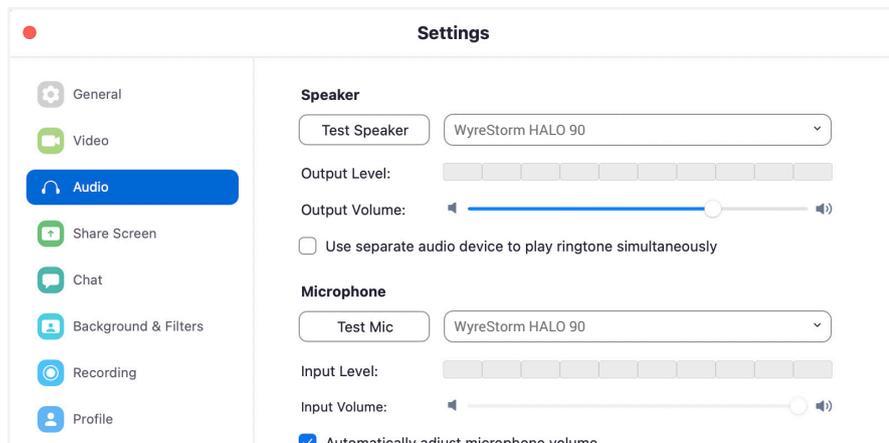

Connecting To Microsoft Teams

To connect the WyreStorm HALO Speakerphone to your Microsoft Teams software, first navigate to your settings pane which can be found by clicking on your display image in the top right hand corner, then click on the devices tab. Here you can change the Audio device by using the dropdown menu. Select WyreStorm HALO device under the applicable options.

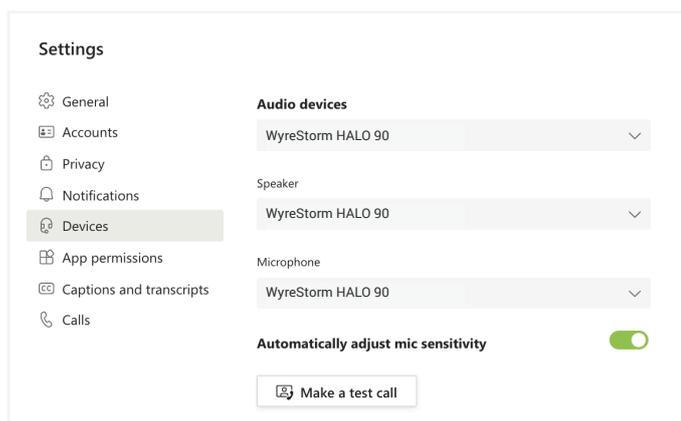

Specifications

Audio and Video	
Inputs	1x USB-C
Outputs	1x HDMI 1x USB-C
Supported Standards	HDMI HDCP USB USB Alt-Mode
Resolution (Max)	4096x2160p @ 60Hz 4:4:4 8bit
Speakerphone	
Microphone	360° 4x Omni-directional Mic Array with Echo Cancellation
Microphone Pickup and Audio Range	5m/16ft
Speaker	3 watts
Control	Capacitive touch power on/off, volume +/- and microphone mute buttons
USB	
Type-C Input	1x USB 3.2 Gen 2x1 SuperSpeed 10Gbps
Type-C Combo Port	1x USB 3.2 Gen 2x1 SuperSpeed 10Gbps Power Delivery (PD): 60w - 85W based on connector DC power supply
Type-A Device Ports	2x USB 3.2 Gen 1x1 SuperSpeed 5Gbps
Power	
Power Supply	Via Computer USB-C Minimum: 5V 3A Available Power to USB-A Ports: 300mA (shared) Via USB-C Charger 45W Charger: 30W pass through laptop charging 1.5A to USB-A ports (shared) 65W Charger: 50W pass through laptop charging 1.5A to USB-A ports (shared) 90W Charger: 75W pass through laptop charging 1.5A to USB-A ports (shared)
Environmental	
Operating Temperature	0 to + 45°C (32 to + 113 °F), 10% to 90%, non-condensing
Storage Temperature	-20 to +70°C (-4 to + 158 °F), 10% to 90%, non-condensing
Max BTU	Standard: 15.3 BTU/hr With USB-C Charging: 30 BTU/hr
Dimensions and Weight	
Height	37.3mm/1.46in
Diameter	128mm/5.03in
Weight	0.46kg/1.01lb
Regulatory	
Safety and Emission	CE FCC RoHS RCM EAC

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.

Note: HDMI & USB-C video outputs cannot be used at the same time.

Note: It is highly recommended to use a native USB-C to USB-C cable between the HALO 90 and a PC due to power consumption requirements. Using a USB-C to USB-A cable may not provide enough current for HALO to fully operate.

Warranty Information

WyreStorm Technologies LLC warrants that its products to be free from defects in material and workmanship under normal use for a period of two (2) years from the date of purchase. Refer to the Product Warranty page on [wyrestorm.com](https://www.wyrestorm.com) for more details on our limited product warranty.

